


Empower your facade

SKALA

SKALA - as diverse as your ideas

- Is a thin-film photovoltaic glass-glass module without disturbing frame.
- Has an opaque black color as standard version.
- Does not need mechanical clamping on the front glass due to its backrail system fitting to all common facade substructures.
- Is most suitable for rainscreen ventilated facades.
- Can be combined with a variety of other facade materials.
- Can be installed in portrait and landscape orientation (depends on regional building regulations).
- Has the general technical building approval (abZ) from Deutsches Institut für Bautechnik (DIBt).
- Is developed and produced in Germany.
- Is approved according to all relevant certifications.
- Is available in different colors and lengths.

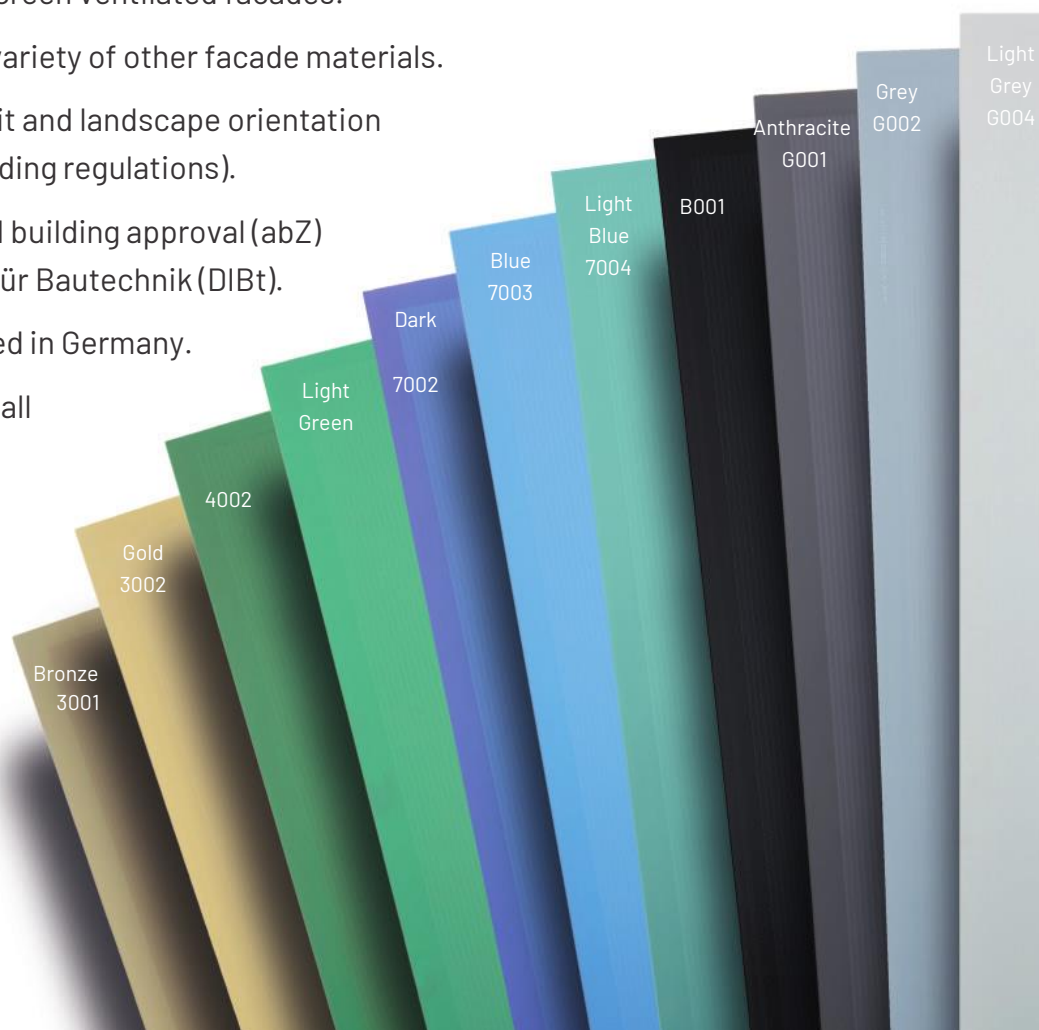

Brand of

AVANCIS 

STB INNOVATIVE CONSTRUCTION

0544588545

info@stboards.com

www.stboards.com



MECHANICAL SPECIFICATION

SKALA	Value
Dimensions	1587 mm × 664 mm
Thickness	38 mm
Weight	17 kg
Cell type	CIGS
Frame	without
Front cover	3.2 mm ESG
Design load ¹⁾ - Safety factor 1.5	upward 3300 Pa downward 3500 Pa
Junction box protection class	IP67
Dimensions of junction box	60 mm × 60 mm × 11.5 mm
Cable lengths (⊖ plug ⊕ socket)	200 mm 320 mm
Cable cross section	2.5 mm ² ; minimal bending radius: 6 × outer diameter
Connector type	H4
Fire rating (roof)	Class C (ANSI/UL 790:2004)
Classification of fire behavior (building envelope)	B2 or B1 (DIN 4102-1:1998-05) ²⁾ B - s2, d0 (DIN EN 13501-1:2019-05)

¹⁾ according to IEC 61730, for standard SKALA mounting

²⁾ valid in Germany, depending on product variant


³⁾ valid for all SKALA color codes excluding B001, B001: can be ordered optionally



- Design qualification and type approval: IEC 61215:2016
- Safety qualification: IEC 61730:2016
- Salt mist corrosion: IEC 61701
- German general building approval (abZ): Z-70.1-224
- WEEE number: DE33274866



664 mm

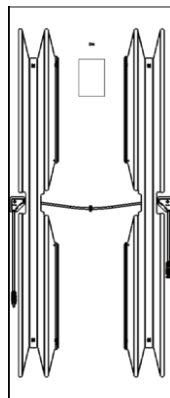

Rear side of module with backrail system for hook-in mounting

ELECTRICAL SPECIFICATION

Data measured under standard test conditions (STC) for full size PV modules:

SKALA xxx ¹⁾	AOBB ¹⁾		
	3002 4001 6004	3001 4002 7002 7003 7004 ³⁾ 6002	B001 G001
Nominal power $P_{nom}^{IV)}$	125 W	135 W	145 W
Sorting	-0 / +5 W		
Module efficiency η	11.9%	12.8%	13.8%
Aperture efficiency η	13.2%	14.2%	15.3%
Open circuit voltage $V_{oc}^{IV)}$	89.2 V	89.3 V	89.4 V
Short circuit current $I_{sc}^{IV)}$	2.07 A	2.21 A	2.35 A
Voltage at mpp $V_{mpp}^{IV)}$	69.4 V	69.4 V	69.4 V
Current at mpp $I_{mpp}^{IV)}$	1.80 A	1.95 A	2.09 A
Max. over-current protection I_R	4.0 A		
Max. system voltage V_{sys}	1000 V		

STC values are valid after stabilization with light according to IEC 61215.

STC: Irradiance 1000 W/m², module temperature 25 °C, spectral light distribution according to atmospheric mass (AM) 1.5.

¹⁾ „xxx“ corresponds to power class in Wp (in steps of 5 W)

²⁾ Color code

³⁾ Placement in performance class subject to reservation

^{IV)} Tolerance of manufacturing: -5%/+10%

Temperature coefficient	Value
Temperature coefficient P_{nom}	-0.39% / °C
Temperature coefficient V_{oc}	-230 mV / °C
Temperature coefficient I_{sc}	0 mA / °C

Data measured at low light intensity:

The relative reduction of the module efficiency at a light intensity of 200 W/m² is 6%, compared to 1000 W/m² at 25 °C module temperature and spectrum AM 1.5. At 500 W/m², the relative increase of module efficiency is +1%.

As a result of ongoing research and product improvements, the specifications in this product data sheet are subject to changes without prior publication. This data sheet is not allowed to be used for deriving any rights, and AVANCIS does not accept any liability with regard to and resulting from the use of information contained herein. Installation equipment is not supplied with the product.

Packaging information (Standard packaging)

Size including pallet (LxWxH)	1650 mm × 800 mm × 1000 mm
Approx. gross weight (full box)	375 kg
Modules per box	20
Maximum no. of stacked boxes	1 on 1 (batch of 2)
Max. truck loading	48 (3 × 8 + 3 × 8)
Max. 40 ft container load (24 t)	28 (1 × 14 + 1 × 14)

Variation of packaging size on individual request



AVANCIS GmbH
Solarstraße 3, D-04860 Torgau
Telefon +49 (0) 3421 7388-0
sales@avancis.de
www.skalafacade.com

AVANCIS

STB INNOVATIVE CONSTRUCTION

0544588545

info@stboards.com

www.stboards.com